ISSUE DATE: SEPTEMBER 2019

Shelf Lights (Per row)

CX3LN - STRATUS

MULTI-DECK SPECIFICATION SHEET



APPLICATIONS

	Case Len		ngth (ft)	
General Case Data	4'	6'	8'	12'
Total Display Area (ft ²)	12.32	18.50	24.65	37.00
Cubic Capacity (ft ³)	21.42	32.16	42.85	64.33
Max Shelf Depth (in) [Top/Bottom]	14/20	14/20	14/20	14/20
Weight (lb)	-	-	-	-
Thermal Load (General)				
Discharge Air Velocity (fpm)	170-220	170-220	170-220	170-220
Fan Speed (rpm)	1200	1200	1200	1200
Discharge Air Temp (°F)	31	31	31	31
Conventional Thermal Load, Single (Btuh) one row of canopy LED	4127	6191	8254	12381
Parallel Thermal Load, Single (Btuh) one row of canopy LED	3970	5955	7940	11935
Additional Btuh per ft LED - Canopy / Shelf & Nose	13 / 11	13 / 11	13 / 11	13 / 11
Thermal Load (HFC)				
Evaporator Temperature (°F)	26	26	26	26
Superheat Setpoint (°F)	6 - 8	6 - 8	6 - 8	6 - 8
Estimated Refrigerant Charge (lbs)	1.241	1.846	2.579	3.925
Thermal Load (Glycol)				
Supply Temperature (°F)	20	20	20	20
Flow (GPM)	QTE	QTE	QTE	QTE
Fluid %	35	35	35	35
Pressure Drop (PSID)	QTE	QTE	QTE	QTE
Electrical Data (Amps/Watts)				
115V/60Hz, 1 Phase				
Fans	0.12	0.24	0.24	0.36
Canopy Lights (Per row)				
GE LED	0.22	0.33	0.44	0.67

0.08

0.10

0.15

0.23

Defrost Data (off Cycle)					
Defrosts per Day	Failsafe Duration (min) ¹	Termination Temp (°F)	Drip Time (min)		
6	25	47	2		

GE LED


1 At ASHRAE conditions. For conditions above 75°F, 55% RH, increase defrost time by 15 min. Type I refrigerator, intended for use in an area where the environmental conditions are controlled and maintained that conditions do not exceed 75°F and 55% relative humidity. Kysor Warren, whose policy is one of continuous improvement, reserves the right to change at any time specifications, designs, or prices without incurring obligation. DOE 2017 Compliant






The above case model has case lengths that are UL and NSF approved.

CX3LN CROSS VIEW

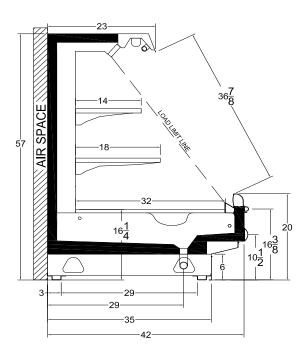

Add 3" thickness for a pair of ends.

CX3LN PLAN VIEW (Single Coil)

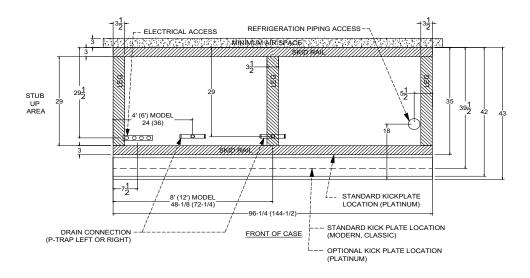

5201 Transport Blvd Columbus, GA 31907

P: 800.866.5596 • F: 706.568.8990



