ISSUE DATE: SEPTEMBER 2018

Fluid %


Fans

Shelf Lights (Per row)

Defrosts per Day

6

CX4LG - STRATUS MULTI-DECK SPECIFICATION SHEET

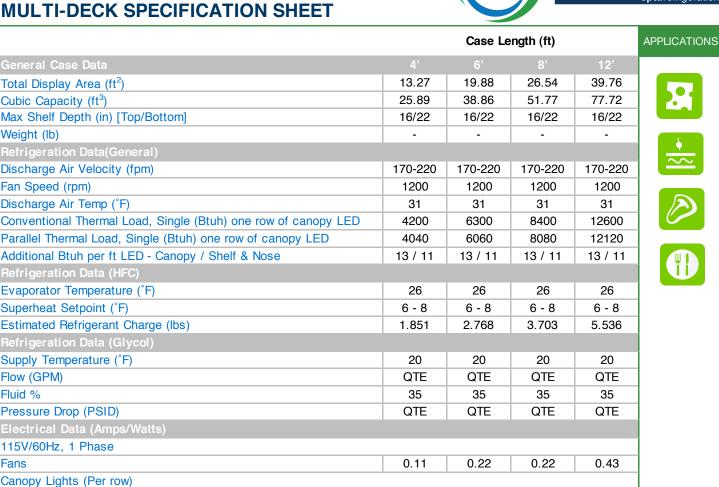

0.22

0.08

Drip Time (min)

2

0.33

0.10

0.44

0.15

0.67

0.23





The above case has case lengths that are UL and NSF approved.

1 At ASHRAE conditions. For conditions above 75°F, 55% RH, increase defrost time by 15 min. Type I refrigerator, intended for use in an area where the environmental conditions are controlled and maintained that conditions do not exceed 75°F and 55% relative humidity. Kysor Warren, whose policy is one of continuous improvement, reserves the right to change at any time specifications, designs, or prices without incurring obligation. DOE 2017 Compliant

Failsafe Duration (min)¹ Termination Temp (°F)

47

GE LED


GE LED

25

KYSOR WARREN epta refrigeration

CX4LG - STRATUS

MULTI-DECK SPECIFICATION SHEET

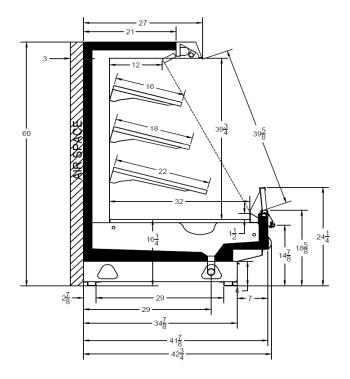

CX4LG CROSS VIEW

Add 3" thickness for a pair of ends.

CX4LG PLAN VIEW

