
ISSUE DATE: SEPTEMBER 2018

DN6LP - STRATUS MULTI-DECK SPECIFICATION SHEET

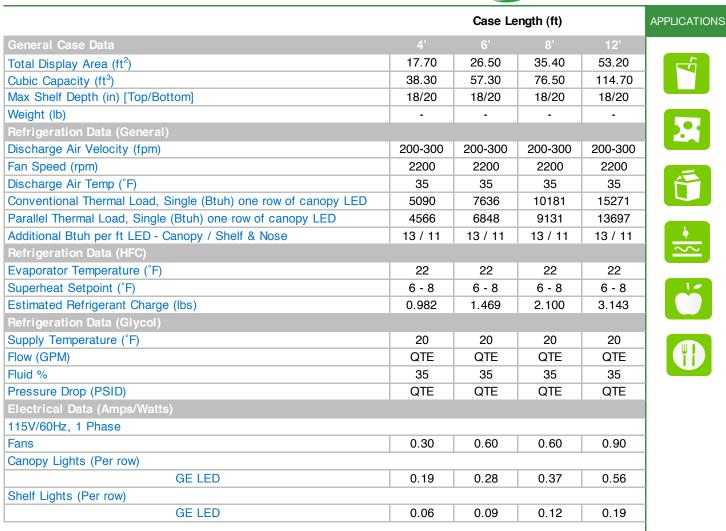

Defrost Data (off Cycle)			
Defrosts per Day	Failsafe Duration (min) ¹	Termination Temp (°F)	Drip Time (min)
6	25	47	0


1 At ASHRAE conditions. For conditions above 75°F, 55% RH, increase defrost time by 15 min. Type I refrigerator, intended for use in an area where the environmental conditions are controlled and maintained that conditions do not exceed 75°F and 55% relative humidity. Kysor Warren, whose policy is one of continuous improvement, reserves the right to change at any time specifications, designs, or prices without incurring obligation. DOE 2017 Compliant

KYSOR WARREN

epta refrigeration



The above case model has case lengths that are UL and NSF approved.

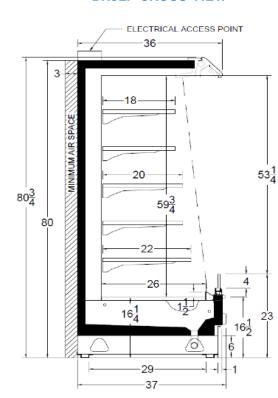

DN6LP CROSS VIEW

DN6LP - STRATUS

MULTI-DECK SPECIFICATION SHEET

Add 3" thickness for a pair of ends.

DN6LP PLAN VIEW (SINGLE COIL)

