
ISSUE DATE: SEPTEMBER 2018

DX5LN - STRATUS MULTI-DECK SPECIFICATION SHEET

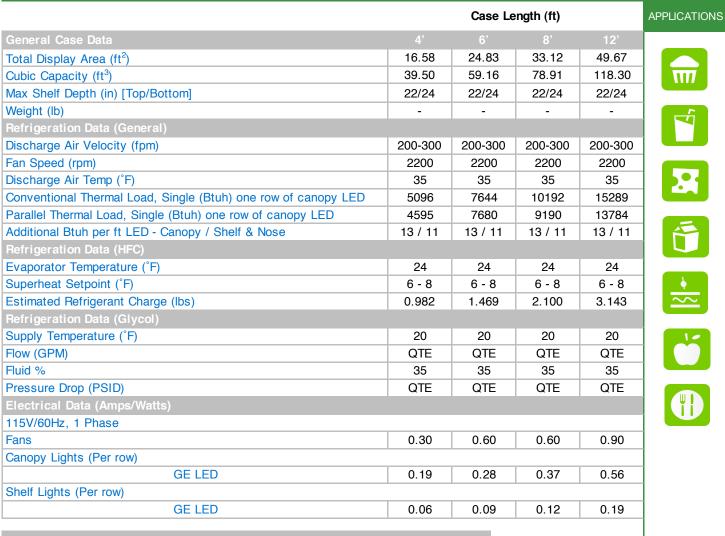

Defrost Data (off Cycle)			
Defrosts per Day	Failsafe Duration (min) ¹	Termination Temp (°F)	Drip Time (min)
6	25	47	0

1 At ASHRAE conditions. For conditions above 75°F, 55% RH, increase defrost time by 15 min. Type I refrigerator, intended for use in an area where the environmental conditions are controlled and maintained that conditions do not exceed 75°F and 55% relative humidity. Kysor Warren, whose policy is one of continuous improvement, reserves the right to change at any time specifications, designs, or prices without incurring obligation. DOE 2017 Compliant

The above case mode has case lengths that are UL and NSF approved.


ANSI / NSF

KYSOR WARREN

epta refrigeration

DX5LN - STRATUS

MULTI-DECK SPECIFICATION SHEET

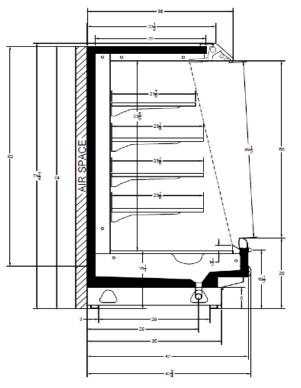

DX5LN CROSS VIEW

Add 3" thickness for a pair of ends.



