







ISSUE DATE: SEPTEMBER 2018



DX6XN - STRATUS

MULTI-DECK SPECIFICATION SHEET



KYSOR WARREN
epta refrigeration

Case Length (ft)					APPLICATIONS
General Case Data	4'	6'	8'	12'	
Total Display Area (ft ²)	17.70	26.50	35.40	53.20	
Cubic Capacity (ft ³)	48.30	71.60	96.50	143.20	
Max Shelf Depth (in) [Top/Bottom]	22/22	22/22	22/22	22/22	
Weight (lb)	-	-	-	-	
Refrigeration Data (General)					
Discharge Air Velocity (fpm)	200-300	200-300	200-300	200-300	
Fan Speed (rpm)	2200	2200	2200	2200	
Discharge Air Temp (°F)	33	33	33	33	
Conventional Thermal Load, Single (Btuh) one row of canopy LED	5038	7556	10075	15113	
Parallel Thermal Load, Single (Btuh) one row of canopy LED	4542	7592	9085	13627	
Additional Btuh per ft LED - Canopy / Shelf & Nose	13 / 11	13 / 11	13 / 11	13 / 11	
Refrigeration Data (HFC)					
Evaporator Temperature (°F)	24	24	24	24	
Superheat Setpoint (°F)	6 - 8	6 - 8	6 - 8	6 - 8	
Estimated Refrigerant Charge (lbs)	0.982	1.469	2.100	3.143	
Refrigeration Data (Glycol)					
Supply Temperature (°F)	20	20	20	20	
Flow (GPM)	QTE	QTE	QTE	QTE	
Fluid %	35	35	35	35	
Pressure Drop (PSID)	QTE	QTE	QTE	QTE	
Electrical Data (Amps/Watts)					
115V/60Hz, 1 Phase					
Fans	0.30	0.60	0.60	0.90	
Canopy Lights (Per row)					
GE LED	0.19	0.28	0.37	0.56	
Shelf Lights (Per row)					
GE LED	0.06	0.09	0.12	0.19	
Defrost Data (off Cycle)					
Defrosts per Day	Failsafe Duration (min) ¹	Termination Temp (°F)	Drip Time (min)		
6	25	47	0		
<p>1 At ASHRAE conditions. For conditions above 75°F, 55% RH, increase defrost time by 15 min. Type I refrigerator, intended for use in an area where the environmental conditions are controlled and maintained that conditions do not exceed 75°F and 55% relative humidity. Kysor Warren, whose policy is one of continuous improvement, reserves the right to change at any time specifications, designs, or prices without incurring obligation. DOE 2017 Compliant</p>					



ANSI / NSF 7

The above case model has case lengths that are UL and NSF approved.




The above case model
has case lengths that
are UL and NSF
approved.

DX6XN - STRATUS

MULTI-DECK SPECIFICATION SHEET

DX6XN CROSS VIEW

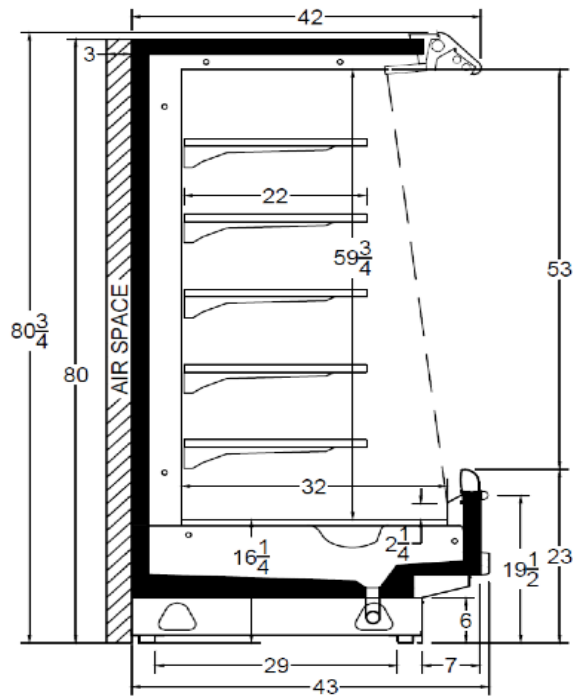

Add 3" thickness for a pair of ends.

DX6XN PLAN VIEW (SINGLE COIL)

