## **ISSUE DATE: SEPTEMBER 2018**

Fluid %

Fans

Canopy Lights (Per row)


Shelf Lights (Per row)

Defrost Data (off Cycle)

Defrosts per Day

6

# **MX3XN - STRATUS** MULTI-DECK SPECIFICATION SHEET

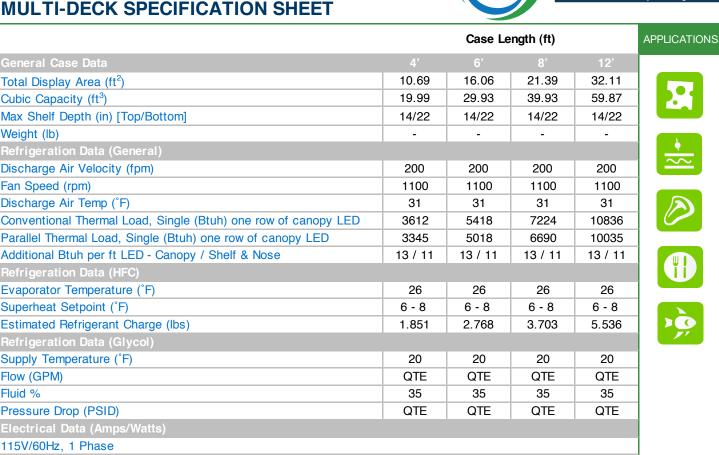

0.09

0.22

0.08

Drip Time (min)

2

0.17

0.33

0.10

0.17

0.44

0.15

0.35

0.67

0.23



**KYSOR WARREN** 

epta refrigeration



The above case are UL and NSF approved

1 At ASHRAE conditions. For conditions above 75°F, 55% RH, increase defrost time by 15 min. Type I refrigerator, intended for use in an area where the environmental conditions are controlled and maintained that conditions do not exceed 75°F and 55% relative humidity. Kysor Warren, whose policy is one of continuous improvement, reserves the right to change at any time specifications, designs, or prices without incurring obligation. DOE 2017 Compliant

Failsafe Duration (min)<sup>1</sup> Termination Temp (°F)

50

GE LED

**GE LED** 

18


## MX3XN - STRATUS

## MULTI-DECK SPECIFICATION SHEET

#### 21-3-16 AIR SPACE 32 $32\frac{3}{4}$ 22 2<u>4</u> 53 32 19<u>1</u>23 $16\frac{1}{4}$ /d\ 6 3-- -29 -29 -35 42 $42\frac{3}{4}$

Add 3" thickness for a pair of ends.

#### **MX3XN PLAN VIEW**

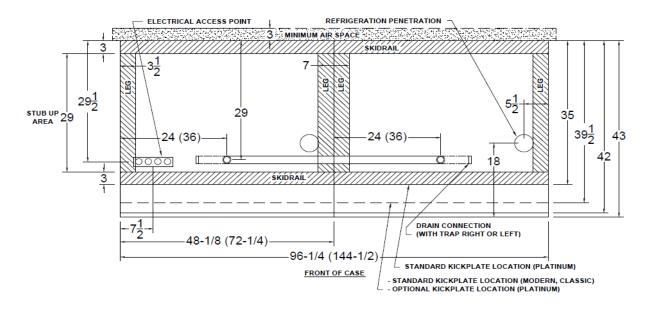

#### **MX3XN CROSS VIEW**