## MX4HN - STRATUS MULTI-DECK SPECIFICATION SHEET




			Case Length (ft)		
General Case Data		4'	6'	8'	12'
Total Display Area (ft <sup>2</sup> )		12.81	19.19	25.59	38.38
Cubic Capacity (ft <sup>3</sup> )		31.41	47.03	62.77	94.07
Max Shelf Depth (in) [Top/Bottom]		16/22	16/22	16/22	16/22
Weight (lb)		-	-	-	-
Thermal Load (General)					
Discharge Air Velocity (fpm)		200-325	200-325	200-325	200-325
Fan Speed (rpm)		1900	1900	1900	1900
Discharge Air Temp (°F)		31	31	31	31
Conventional Thermal Load, Single (Btuh) one row of canopy LED		4103	6155	8207	12310
Parallel Thermal Load, Single (Btuh) one row of canopy LED		3800	5699	7599	11399
Additional Btuh per ft LED - Canopy / Shelf & Nose		13 / 11	13 / 11	13 / 11	13 / 11
Thermal Load (HFC)					
Evaporator Temperature (°F)		26	26	26	26
Superheat Setpoint (°F)		6 - 8	6 - 8	6 - 8	6 - 8
Estimated Refrigerant Charge (lbs)		1.241	1.846	2.579	3.925
Thermal Load (Glycol)					
Supply Temperature (°F)		20	20	20	20
Flow (GPM)		QTE	QTE	QTE	QTE
Fluid %		35	35	35	35
Pressure Drop (PSID)		QTE	QTE	QTE	QTE
Electrical Data (Amps/Watts)					
115V/60Hz, 1 Phase					
Fans		0.33	0.66	0.66	0.99
Canopy Lights (Per row)					
GE LED		0.22	0.33	0.44	0.67
Shelf Lights (Per row)					
GE LED		0.08	0.10	0.15	0.23
Defrost Data (off Cycle)					
Defrosts per Day Failsafe Duration (min) <sup>1</sup>	Termination Temp (°F)	Drip Time (	min)		
6 18	50	2			

1 At ASHRAE conditions. For conditions above 75°F, 55% RH, increase defrost time by 15 min. Type I refrigerator, intended for use in an area where the environmental conditions are controlled and maintained that conditions do not exceed 75°F and 55% relative humidity. Kysor Warren, whose policy is one of continuous improvement, reserves the right to change at any time specifications, designs, or prices without incurring obligation. DOE 2017 Compliant






The above case model has case lengths that are UL and NSF approved.



**MX4HN CROSS VIEW** 

Add 3" thickness for a pair of ends.



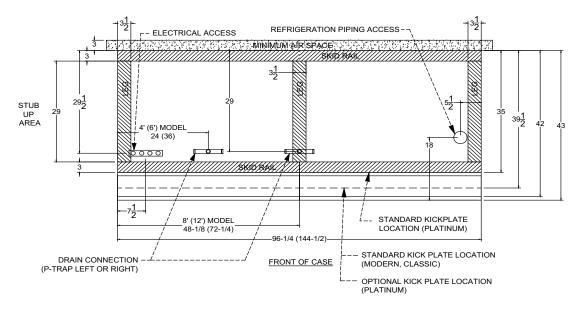

5201 Transport Blvd Columbus, GA 31907 P: 800.866.5596 • F: 706.568.8990

www.kysorwarren.com

f in 🖸 🞯

