ISSUE DATE: NOVEMBER 2018

Total Display Area (ft²)

Max Shelf Depth (in) [Top/Bottom]

Discharge Air Velocity (fpm)

Discharge Air Temp (°F)

Refrigeration Data (HFC) Evaporator Temperature (°F)

Superheat Setpoint (°F)

Supply Temperature (°F)

Pressure Drop (PSID)

115V/60Hz, 1 Phase

Canopy Lights (Per row)

Shelf Lights (Per row)

Flow (GPM) Fluid %

Estimated Refrigerant Charge (lbs)

Cubic Capacity (ft³)

Fan Speed (rpm)

Weight (lb)

MX5HN - STRATUS

MULTI-DECK SPECIFICATION SHEET

Conventional Thermal Load, Single (Btuh) one row of canopy LED

GE LED

GE LED

Parallel Thermal Load, Single (Btuh) one row of canopy LED

Additional Btuh per ft LED - Canopy / Shelf & Nose



PPLICATIONS

Case

20

QTE

35

QTE

0.83

0.33

0.09

16.83

39.30

16/22

200-225

2200

30

5264

4847

13 / 11

23

6 - 8

2.214

20

QTE

35

QTE

0.41

0.22

0.06

Case Length (ft)			
		12'	
25.21	33.63	50.42	
58.90	78.60	117.90	
16/22	16/22	16/22	
-	-	-	
200-225	200-225	200-225	
2200	2200	2200	
30	30	30	
7896	10528	15792	
7271	9695	14542	
13 / 11	13 / 11	13 / 11	
23	23	23	
6 - 8	6 - 8	6 - 8	
3.310	4.428	6.619	

20

QTE

35

QTE

0.83

0.44

0.12

20

QTE

35

QTE

1.24

0.67

0.19

Defrost Data (off Cycle)					
Defrosts per Day	Failsafe Duration (min) ¹	Termination Temp (°F)	Drip Time (min)		
6	29	45	0		


1 At ASHRAE conditions. For conditions above 75°F, 55% RH, increase defrost time by 15 min. Type I refrigerator, intended for use in an area where the environmental conditions are controlled and maintained that conditions do not exceed 75°F and 55% relative humidity. Kysor Warren, whose policy is one of continuous improvement, reserves the right to change at any time specifications, designs, or prices without incurring obligation. DOE 2017 Compliant





The above case mode

MX5HN CROSS VIEW

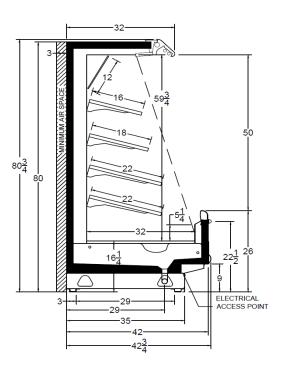

Add 3" thickness for a pair of ends.

MX5HN PLAN VIEW (SINGLE COIL)

