ISSUE DATE: NOVEMBER 2018

MX5HP - STRATUS

MULTI-DECK SPECIFICATION SHEET



Case Length (ft)

5 • 4



APPLICATIONS







General Case Data			8'	12'
Total Display Area (ft²)	16.83	25.21	33.63	50.42
Cubic Capacity (ft ³)		58.90	78.60	117.90
Max Shelf Depth (in) [Top/Bottom]		16/22	16/22	16/22
Weight (lb)		-	-	-
Refrigeration Data (General)				
Discharge Air Velocity (fpm)		200-225	200-225	200-225
Fan Speed (rpm)	2200	2200	2200	2200
Discharge Air Temp (°F)		30	30	30
Conventional Thermal Load, Single (Btuh) one row of canopy LED		7218	9624	14436
Parallel Thermal Load, Single (Btuh) one row of canopy LED		6647	8862	13293
Additional Btuh per ft LED - Canopy / Shelf & Nose		13 / 11	13 / 11	13 / 11
Refrigeration Data (HFC)				
Evaporator Temperature (°F)		23	23	23
Superheat Setpoint (°F)	6 - 8	6 - 8	6 - 8	6 - 8
Estimated Refrigerant Charge (lbs)	2.214	3.310	4.428	6.619
Refrigeration Data (Glycol)				
Supply Temperature (°F)	20	20	20	20
Flow (GPM)	QTE	QTE	QTE	QTE
Fluid %		35	35	35
Pressure Drop (PSID)		QTE	QTE	QTE
Electrical Data (Amps/Watts)				
115V/60Hz, 1 Phase				
Fans		0.83	0.83	1.24
Canopy Lights (Per row)				
GE LED		0.33	0.44	0.67
Shelf Lights (Per row)				
GE LED	0.08	0.10	0.15	0.23

Defrosts per Day	Failsafe Duration (min) ¹	Termination Temp (°F)	Drip Time (min)
Deliosis per Day	Failsare Duration (min)	remination remp (1)	Dub une (um)
6	29	45	0


1 At ASHRAE conditions. For conditions above 75°F, 55% RH, increase defrost time by 15 min. Type I refrigerator, intended for use in an area where the environmental conditions are controlled and maintained that conditions do not exceed 75°F and 55% relative humidity. Kysor Warren, whose policy is one of continuous improvement, reserves the right to change at any time specifications, designs, or prices without incurring obligation. DOE 2017 Compliant





The above case model has case lengths that are UL and NSF approved

MX5HP CROSS VIEW

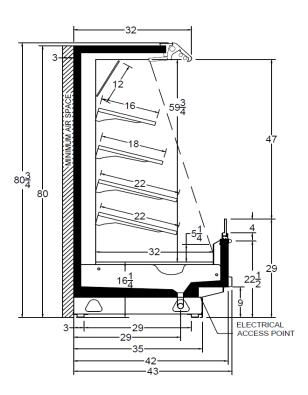

Add 3" thickness for a pair of ends.

MX5HP PLAN VIEW (SINGLE COIL)

