ISSUE DATE: SEPTEMBER 2018

MX7XP - STRATUS





Case Length (ft)

APPLICATIONS

•	





General Case Data		6'		12'
Total Display Area (ft²)		29.1	38.82	58.2
Cubic Capacity (ft ³)		76.10	101.40	152.20
Max Shelf Depth (in) [Top/Bottom]	18/22	18/22	18/22	18/22
Weight (lb)	-	-	-	-
Refrigeration Data (General)				
Discharge Air Velocity (fpm)	200-325	200-325	200-325	200-325
Fan Speed (rpm)	1900	1900	1900	1900
Discharge Air Temp (°F)	29	29	29	29
Conventional Thermal Load, Single (Btuh) one row of canopy LED	5448	8172	10896	16345
Parallel Thermal Load, Single (Btuh) one row of canopy LED		7565	10087	15131
Additional Btuh per ft LED - Canopy / Shelf & Nose		13 / 11	13 / 11	13 / 11
Refrigeration Data (HFC)				
Evaporator Temperature (°F)		23	23	23
Superheat Setpoint (°F)		6 - 8	6 - 8	6 - 8
Estimated Refrigerant Charge (lbs)		3.310	4.428	6.619
Refrigeration Data (Glycol)				
Supply Temperature (°F)		20	20	20
Flow (GPM)		QTE	QTE	QTE
Fluid %		35	35	35
Pressure Drop (PSID)		QTE	QTE	QTE
Electrical Data (Amps/Watts)				
115V/60Hz, 1 Phase				
Fans		0.59	0.59	1.17
Canopy Lights (Per row)				
GE LED	0.22	0.33	0.44	0.67
Shelf Lights (Per row)		<u> </u>	<u> </u>	
GE LED	0.08	0.10	0.15	0.23

Defrost Data (off Cycle)					
Defrosts per Day	Failsafe Duration (min) ¹	Termination Temp (°F)	Drip Time (min)		
6	18	50	2		


1 At ASHRAE conditions. For conditions above 75°F, 55% RH, increase defrost time by 15 min. Type I refrigerator, intended for use in an area where the environmental conditions are controlled and maintained that conditions do not exceed 75°F and 55% relative humidity. Kysor Warren, whose policy is one of continuous improvement, reserves the right to change at any time specifications, designs, or prices without incurring obligation. DOE 2017 Compliant





The above case model has case lengths that are UL and NSF approved.

MX7XP CROSS VIEW

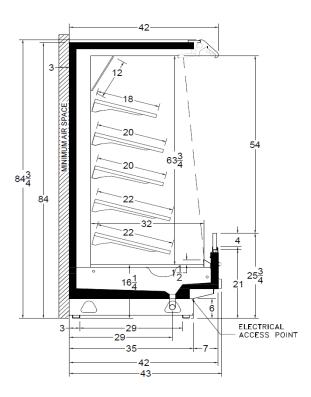

Add 3" thickness for a pair of ends.

MX7XP PLAN VIEW

