



**KYSOR WARREN**  
eptarefrigeration



# OVERTURE

MEDIUM TEMPERATURE SELF-CONTAINED MERCHANDISER



## QUICK, SIMPLE & LOW-COST INSTALLATION

- Simply plug-in and load
- No pumps or floor drains required

## UNIQUE FEATURES

- Extremely quiet
- Lowest preventative maintenance
- Integrated electronic controls, standard
- Noncorrosive evaporator pan and components
- Cases can be joined into continuous lineups


## ECO-FRIENDLY

The cabinet uses propane, a natural refrigerant, providing an environmentally sound solution for reaching your refrigeration & sustainability goals.

**R290**


## SPECIFICATIONS & OPTIONS

- 39.44", 51.75", 76.35" widths (with ends)
- 79.65" Height
- LED canopy and shelf lighting,
- 120v L5-20P plug
- Adjustable feet
- (5) adjustable shelves with PTM
- Night curtain
- Standard black exterior/interior, white optional
- Tempered insulated glass-view ends, or solid ends with interior mirror finish
- Options for: multiplex kits, peg hooks



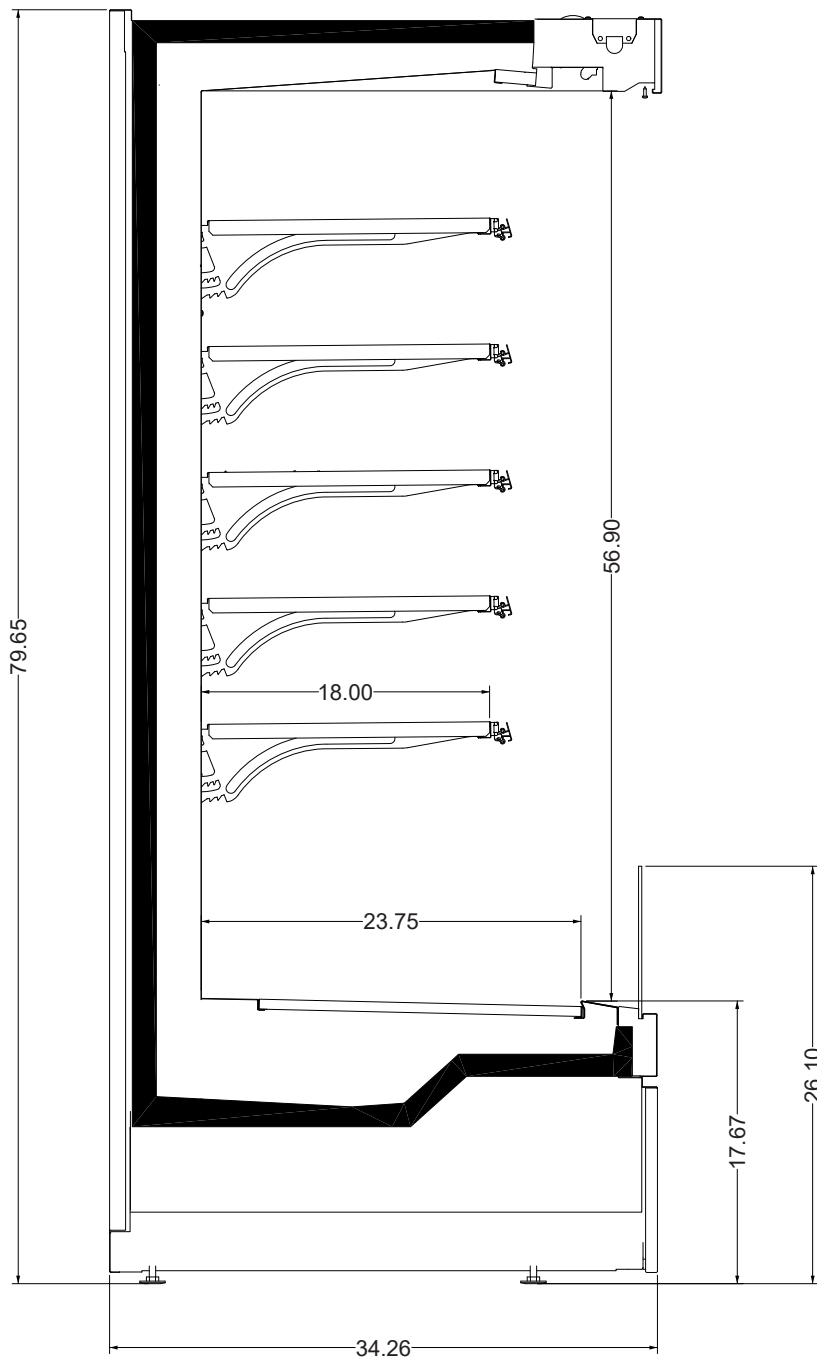


Section View




<b>Length (in)</b>	39.44	51.75	76.35
<b>Depth (in)</b>	34.54	34.54	34.54
<b>Height (in)</b>	79.65	79.65	79.65
<b>Shelf area (ft²)</b>	22.89	30.54	45.78
<b>Storage capacity (ft³)</b>	22.68	30.94	45.34
<b>Total display area (TDA) (ft²)</b>	14.52	19.38	29.06
<b>Product temp (°F)</b>	>41	>41	>41
<b>Refrigerant type</b>	R290	R290	R290
<b>Energy Consumption (KW-HR per day)</b>	16.11	21.53	32.31
<b>Heat rejection (BTU/HR)</b>	2291	3062	4595
<b>Defrost</b>	Time off: 8/day 50° termination	Time off: 8/day 50° termination	Time off: 8/day 50° termination
<b>Package dimensions (L x H x D) (in)</b>	43.90x85.85x38.39	56.30x85.85x38.39	80.30x85.85x38.39
<b>Net weight (lb)</b>	595	638	868
<b>Gross weight (lb)</b>	625	740	1150
<b>Plug type</b>	L5-20P	L5-20P	(2) L5-20P
<b>Cord length (in)</b>	80	80	80



Plan View

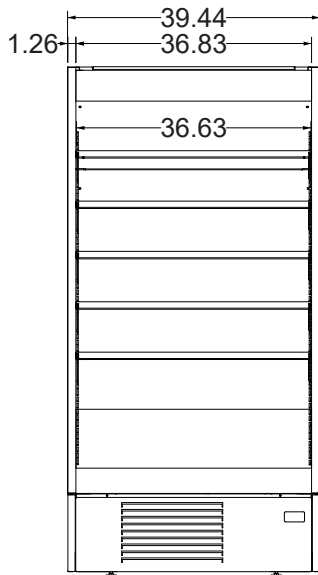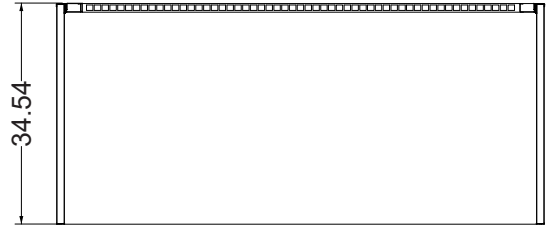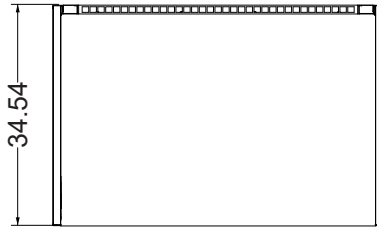

Front View

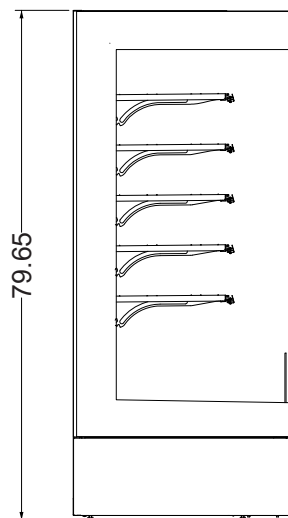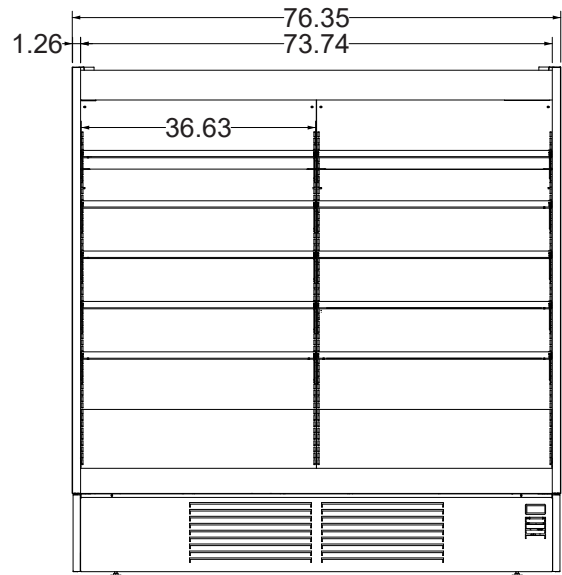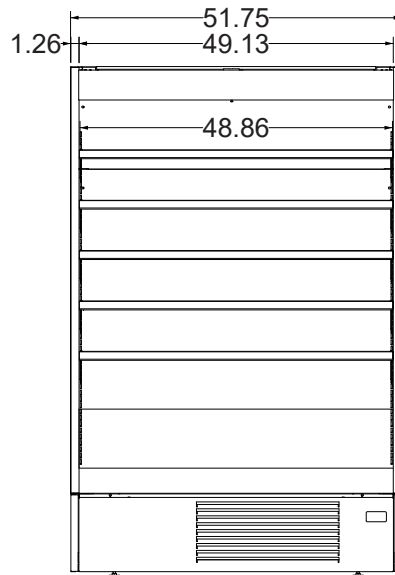

Side View



[www.kysorwarren.com](http://www.kysorwarren.com)

