ISSUE DATE: SEPTEMBER 2018

QWST - Legacy IslandISLAND SPECIFICATION SHEET



Case Length (ft)

APPLICATIONS

General Case Data	6'	8'	12'		
Total Display Area (ft²)	14.26	19.02	28.52		
Cubic Capacity (ft³)	19.36	25.82	38.72		
Max Shelf Depth (in) [Top/Bottom]	NA NA	NA	NA		
Weight (lb)	-	1500	1850		
Refrigeration Data (All data is per side)		1000	1000		
Evaporator Temperature (°F)					
Frozen Food	-15	-15	-15		
Ice Cream	-20	-20	-20		
Dairy	24	24	24		
Discharge Air Temperature (°F)					
Frozen Food	-11	-11	-11		
Ice Cream	-16	-16	-16		
Dairy	30	30	30		
Discharge Air Velocity (fpm)	175	175	175		
Fan Speed (rpm)	1800	1800	1800		
Parallel Thermal Load (Btuh unlighted)					
Frozen Food	1714	2285	3427		
Ice Cream	1926	2568	3853		
Dairy	1155	1540	2310		
Conventional Thermal Load (Btuh unlighted)					
Frozen Food	1788	2384	3576		
Ice Cream	2010	2680	4020		
Dairy	1260	1680	2520		
Superheat Setpoint (°F)	6-8	6-8	6-8		
Estimated Refrigerant Charge (lbs)	7.504	10.324	16.035		
Electrical Data (Amps/Watts)					
ECM Fan Data (Amps/Qty)	0.42 / 2	0.42 / 2	0.63 / 3		
Anti-Sweat Heater Amps (I.C./F.F./Med. Temp)	0.89	0.97	1.46		
Drain Heater Amps					
Electric	0.65	0.65	0.65		
Hot Gas	0.39	0.65	1.09		
Defrost Heater Amps (Low/Dual Temp)	5.90	8.48	12.72		

Defrost Data						
	Per Day	Fail Safe (min) ¹	Termination (°F)	Drip Time (min)		
Electric	1	60	47	0		
Hot Gas	1	25	47	0		
Off Cycle	3	40	47	0		


¹ At ASHRAE conditions. For conditions above 75°F, 55% RH, increase defrost time by 15 min. Type I refrigerator, intended for use in an area where the environmental conditions are controlled and maintained that conditions do not exceed 75°F and 55% relative humidity. Kysor Warren, whose policy is one of continuous improvement, reserves the right to change at any time specifications, designs, or prices without incurring obligation. DOE 2017 Compliant





The above case model has case lengths that are UL and NSF approved.

QWST CROSS VIEW

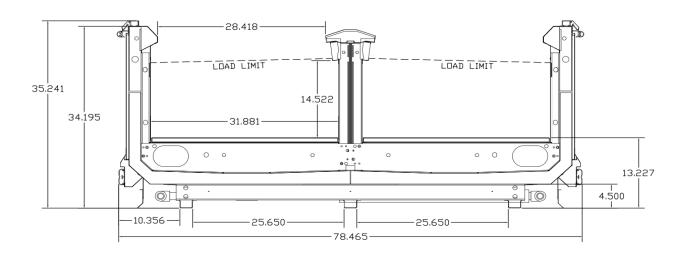

Add 3" thickness for a pair of flat ends.

QWST PLAN VIEW

